



REL NO	LTR	NO	REVISION	OWN	CAD	APVD	DATE
ECO-137084	C	1	DRAWING HAS BEEN PICTORIALY UPDATED	AK	NK	J.MATTHEWS	11SEP13
		2	ADD NOTE 3	AK	NK	J.MATTHEWS	11SEP13
		3	ADD NOTE 4	AK	NK	J.MATTHEWS	11SEP13
		4	SEE ECO FOR DETAIL	AK	NK	J.MATTHEWS	11SEP13

NOTE:


- DIM [] IN INCHES
- 120° AND 170° ARE DETENTED OPEN ANGLE OF HINGE.
- WHEN HOUSING IS INSTALLED ON AN OPEN GENERATOR SET, THE TOTAL WEIGHT WILL INCREASE BY 84 KG (185 LBS). THIS INCLUDES THE MUFFLER.
- THE CENTER OF GRAVITY(CG) OF THE GENERATOR SET WHEN EQUIPPED WITH THIS HOUSING SHIFTS APPROXIMATELY 51MM (2 INCH) TOWARDS THE AIR DISCHARGE END OF HOUSING AND 42MM (1.5 INCH) FROM THE GROUND, COMPARED TO THE EQUIVALENT NON-HOUSED PRODUCT WITH THE F179 SKID. SEE HOUSING READY SKID BASE OUTLINE DRAWING FOR CG LOCATION OF NON HOUSED PRODUCT.

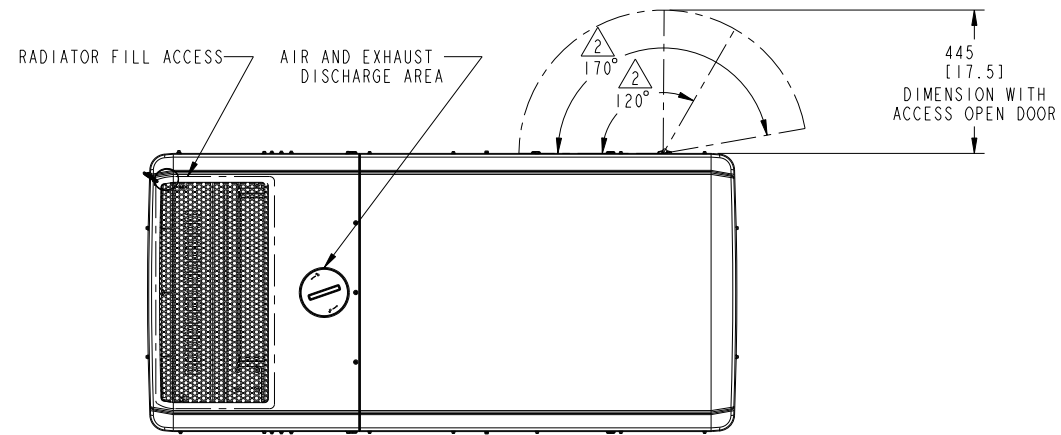


TOP VIEW

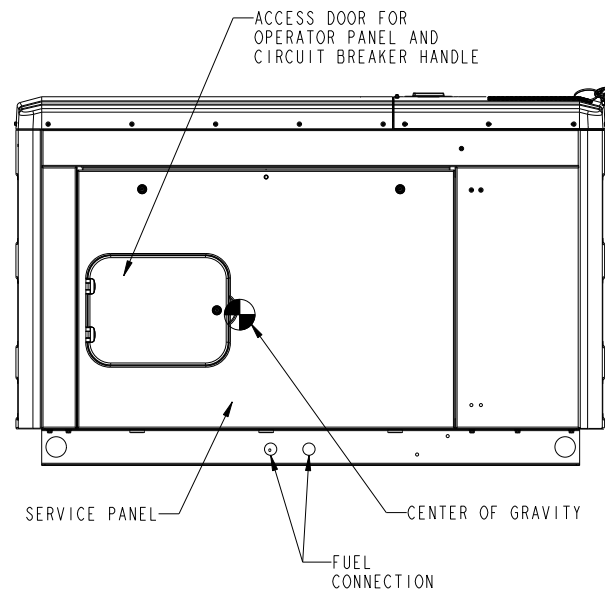


RIGHT SIDE VIEW

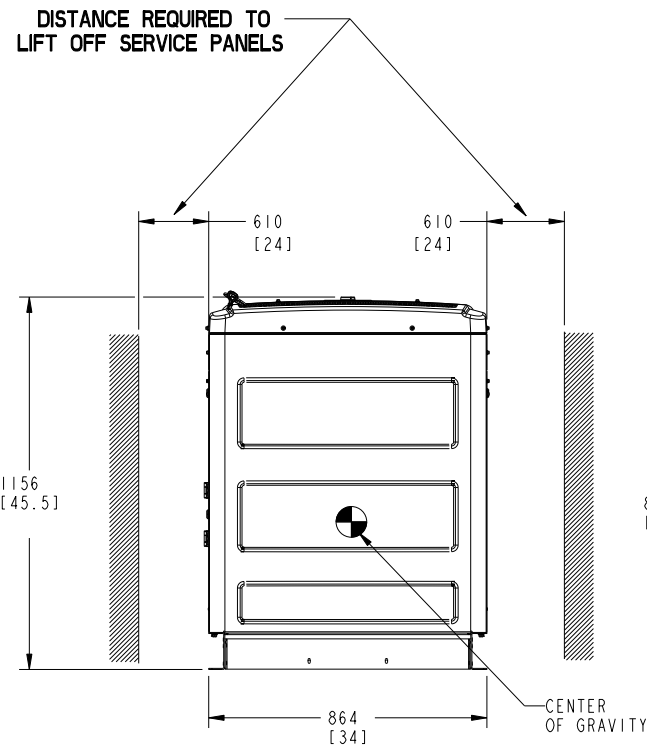

OUTLET VIEW

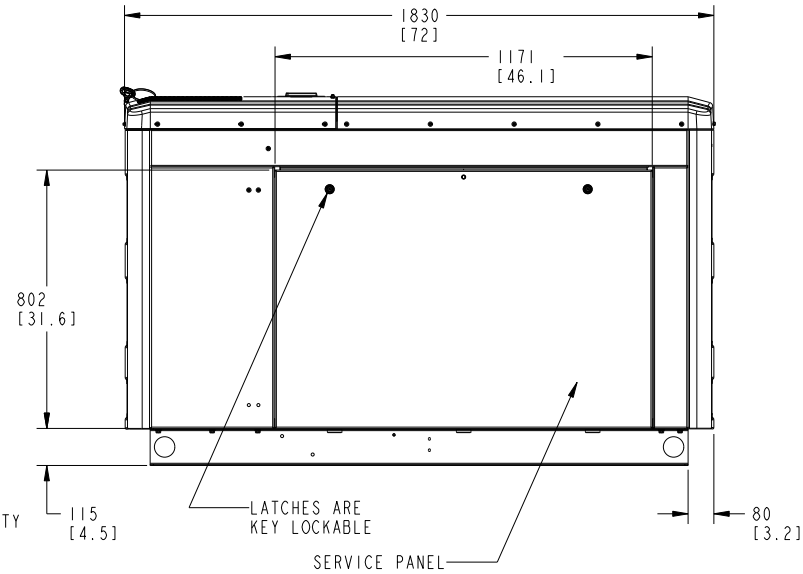

LEFT SIDE VIEW


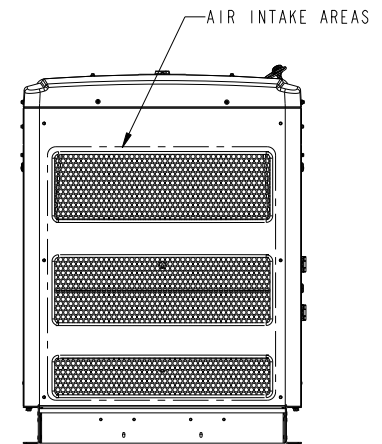


INLET VIEW

F231-2 ENCLOSURE CONFIGURATION

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS		SIM 10 NONE	OWN S.GAMBHIRE	CUMMINS POWER GENERATION
DO NOT SCALE PRINT		CAD T.RADKE	APVD J.MATTHEWS	
CH	X ± 1	0.00- 4.99 +0.15/-0.08	DATE 17JAN13	OUTLINE, ENCLOSURE
	.X ± 0.8	5.00- 9.99 +0.20/-0.10	SITE CODE	
	.XX ± 0.38	10.00-17.49 +0.25/-0.13	PGF	A043U604
		17.50-24.99 +0.30/-0.13	ARROW	
ANG TOL:	± 0.5°	SCALE: 1/10	FOR INTERPRETATION OF DIMENSIONS AND TOLERANCING, SEE ASME Y14.5M-1994	SHEET 1 OF 2
			PROPERTY OF CUMMINS POWER GENERATION GROUP	REV C

REL NO	LTR	NO	REVISION	OWN	CAD	APVD	DATE
ECO-137084	C	-	---	AK	NK	J.MATTHEWS	11SEP13

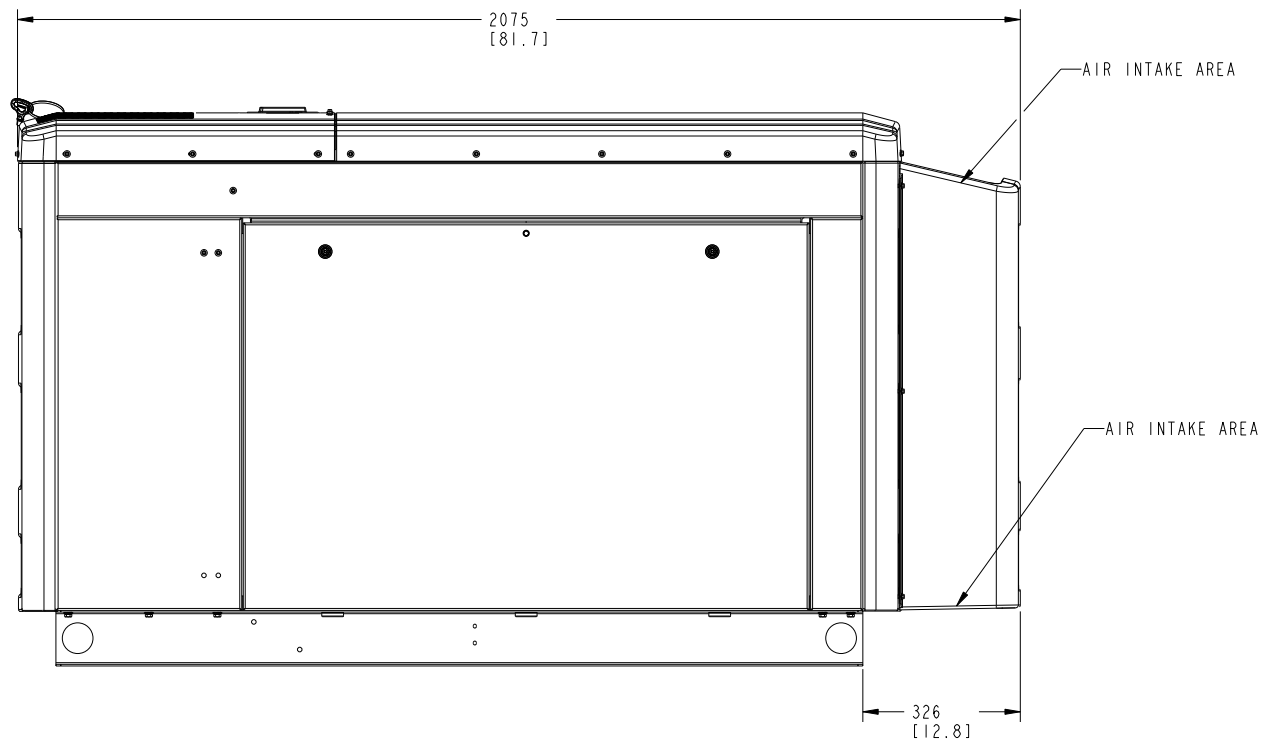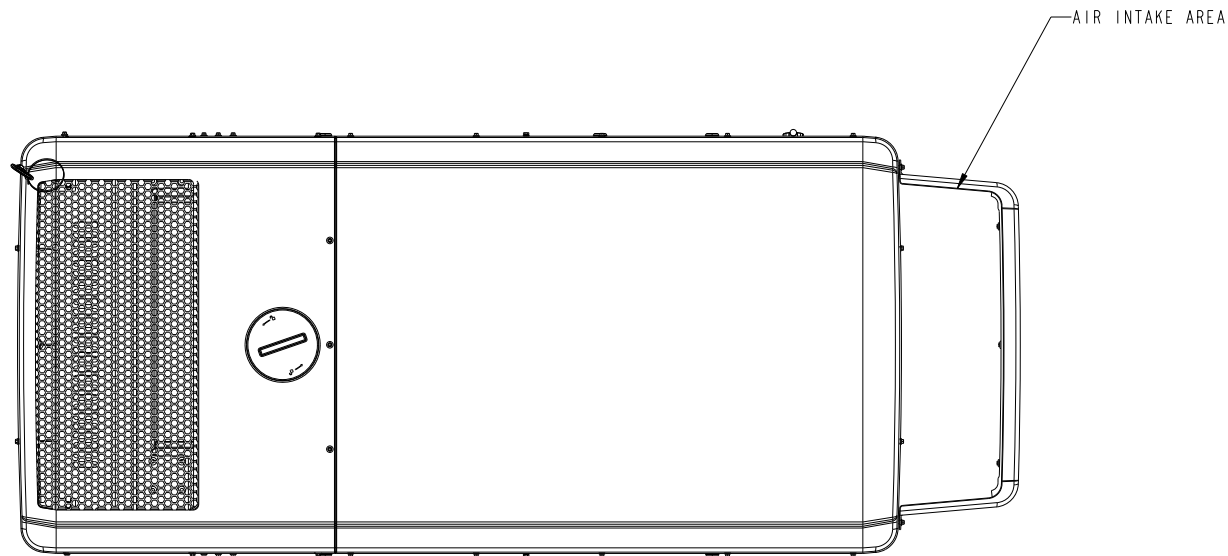

F217-2 ENCLOSURE CONFIGURATION

REFER TO PAGE 1 (F231-2 ENCLOSURE) FOR OTHER F217-2 ENCLOSURE DIMENSIONS.

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS		SIM 10 NONE	OWN S.GAMBHIRE		CUMMINS POWER GENERATION	
DO NOT SCALE PRINT		CAD T.RADKE	APVD J.MATTHEWS		OUTLINE, ENCLOSURE	
CH	SIZE	TOLERANCE	DATE 17JAN13	SITE CODE	SCALE 1/10	REV C
X ± 1	0.00- 4.99	+0.15/-0.08				
.X ± 0.8	5.00- 9.99	+0.20/-0.10				
.XX ± 0.38	10.00-17.49	+0.25/-0.13				
	17.50-24.99	+0.30/-0.13				
ANG TOL: ± 0.5°	SCALE: 1/10	PROPERTY OF CUMMINS POWER GENERATION GROUP	FOR INTERPRETATION OF DIMENSIONS AND TOLERANCING, SEE ASME Y14.5M-1994	ARROW	PGF	2 OF 2
			FIRST USED ON	PGF	D	C
			A043U604			

Part A043U604 C

Description	Legacy Name	External Regulations	Application Status	Release Phase Code	Security Classification	Alternates
OUTLINE,ENCLOSURE	A043U604	None	Production Only	Production	Proprietary	

Part Specifications :A043U604 C

Name	Description	Legacy Name
A030B356	SPECIFICATION,MATERIAL	CES10903
A043U605	DRAWING,ENGINEERING	A043U605