

VILLAGE OF LOMBARD CHANGE ORDER

PROJECT NAME: Terrace View Pond Improvements

PROJECT NO.: SS-11-01

LOCATION: Crystal Avenue & Greenfield Avenue

CHANGE ORDER: 1

CONTRACTOR: Martam Construction, Inc.

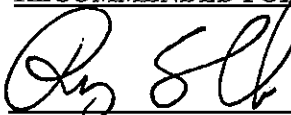
DATE: 7/26/2013

DESCRIPTION OF CHANGE ORDER: Implementation of an aeration system

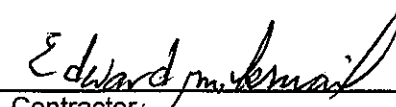
ORIGINAL CONTRACT AMOUNT:	[1] <u>\$1,227,446.00</u>
TOTAL OF PREVIOUS AUTHORIZED CHANGE ORDERS:	[2] <u>\$0.00</u>
CURRENT CONTRACT AMOUNT: ([1]+[2])	[3] <u>\$1,227,446.00</u>
PROPOSED CHANGE ORDER: (PENDING APPROVAL)	[4] <u>\$32,218.33</u>
PROPOSED REVISED CONTRACT AMOUNT: (PENDING APPROVAL) ([3]+[4])	[5] <u>\$1,259,664.33</u>

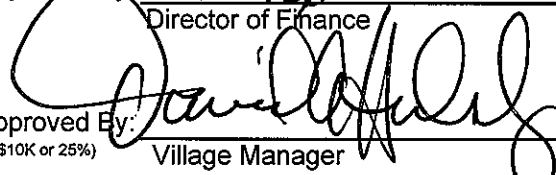
NET OF ALL CHANGE ORDERS: (PENDING APPROVAL) ([2]+[4])	<u>\$32,218.33</u>
TIME EXTENSION OR REDUCTION:	<u>0</u>
TOTAL CONTRACT TIME:	<u>164 calendar days</u>
BUDGET ESTIMATE:	<u>\$555,000.00</u>
ENGINEER'S ESTIMATE:	<u>\$981,654.50</u>

RECOMMENDED FOR ACCEPTANCE :


 7-29-13
Resident Engineer Date

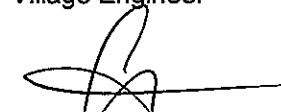
Approved By:  8/19/13
Director of Finance Date


 7/30/2013
Contractor Date

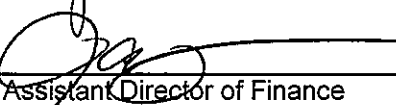
Approved By:  8/19/13
(<\$10K or 25%) Village Manager Date

 7/30/13
Village Engineer Date

Approved By:  8/15/13
(>\$10K or 25%) Acting Village President Date

 7/30/13
Director of Public Works Date

Attest:  8/15/13
Village Clerk Date

 8/16/13
Assistant Director of Finance Date

It is understood that as part of this change order that the Contractor agrees that all bonds, permits, insurance and guarantees are hereby extended to incorporate this Change Order.

Terrace View Pond Improvements
Change Order #: 1

7/26/2013

Coded Pay Item	No.	Item	Current Quantity	Unit	Unit Price	Revised Quantity	Difference	Amount	Description
AUP#1		Installation of Aeration System	0	LS	\$22,384.58	1	1	\$22,384.58	Installation of bubblers, hoses and air compressor
AUP#2		Electrical Installation	0	LS	\$558.00	3	3	\$558.00	Installation of a three (3) wire, 30 A circuit between the pump control panel and the
AUP#3		Excavation/Backfill	0	LS	\$1,100.00	1	1	\$1,100.00	Excavation/Backfill of a 12" to 18" by 24" trench for the aeration tubing from the pump control panel to the water's edge
AUP#4		Modify Control Cabinet	0	LS	\$1,494.15	1	1	\$1,494.15	Excavation/Backfill of a 12" to 18" by 24" trench for the aeration tubing from the pump control panel to the water's edge
42000300	17	PORTLAND CEMENT CONCRETE PAVEMENT 8"	67	SQ YD	\$72.00	143.8	76.8	\$5,529.60	Replacement of additional panels of concrete pavement in the vicinity of 15 West Crystal Avenue
44000100	18	PAVEMENT REMOVAL	67	SQ YD	\$15.00	143.8	76.8	\$1,152.00	Removal of additional panels of concrete pavement in the vicinity of 15 West Crystal Avenue

TOTAL AMOUNT = \$32,218.33